



Development and Evaluation of a Method for Micro Object Transfer into Live Cells by Liposome Electrofusion

著者	齋藤 明
号	60
学位授与機関	Tohoku University
学位授与番号	工博第5255号
URL	http://hdl.handle.net/10097/00120586

	さいとう あきら
氏 名	齋藤 明
授与学位	博士(工学)
学位授与年月日	平成28年3月25日
学位授与の根拠法規	学位規則第4条第1項
研究科, 専攻の名称	東北大学大学院工学研究科 (博士課程) バイオロボティクス専攻
学位論文題目	Development and Evaluation of a Method for Micro Object Transfer into Live Cells by Liposome Electrofusion
指導教員	東北大学准教授 野村 慎一郎
論文審査委員	主査 東北大学教授 村田 智 東北大学教授 工藤 成史 東北大学教授 小椋 利彦 東北大学准教授 野村 慎一郎

論文内容要旨

Living systems consist of hierarchies, such as organs, tissues, cells, intracellular organs (organelles), and molecules. Although cells have various sizes and forms, cells all possess properties such as absorbing extracellular objects, responding to external stimuli, and reproducing their own cellular structures. From a mechanical engineering point of view, the cells (and organelles) are precision machines with absolute autonomy. To investigate the mechanical properties of intracellular structures, conventional techniques such as bend measurements use microneedles, which need to break the membrane and eventually kill the cell. Intracellular components can act quite differently between living and extracted conditions, therefore, non-invasive or low-invasive methods which are able to manipulate intracellular conditions are awaited.

In order to transfer various objects into cells, endocytosis has been widely utilized. In endocytosis, the external solution becomes entrapped in a closed vesicle consisting of a “reversed” plasma membrane. The sizes of transferable objects through this pathway are quite limited, up to several hundred nanometers in diameter. To overcome this, microinjection is generally used. However, such a labor intensive method is not feasible for many applications. Electroporation, a method that make micropores in the cell membrane for transferring DNA/RNA molecules by exposing the target cell to an electric field, is able to treat many cells at once. However, electroporation is limited to the transfer of nucleic acids and small soluble molecules only. Cell-cell fusion is widely used for constructing hybridomas. Particularly, the cell-cell electrofusion by electroporation, causing membrane breakdown, has been well investigated. The breakdown process consists of the following two steps. First, cells form “pearl-like chains” in AC electric fields along the electrical flux by effect of dielectrophoresis. Then a high voltage DC pulse is applied to the electrodes to break the membranes. Intracellular transfer of cellular ingredients takes place at the pore when the DC pulse applied. This fusion

has been widely used in bioengineering because it can fuse many cells, and can avoid undesired damage caused by carrier materials such as peptides or viral vectors.

On the other hand, various biocompatible nano-micro particles have been developed, including thermo sensing polymers and DNA origami objects. If the artificial objects are transferred non-invasively to the live cells, they are able to measure various intracellular activities in living conditions. For instance, nuclear transplantation into a foreign cell has been tried, in order to elucidate molecular mechanisms of mitochondria using microinjection. However, this approach is not suitable to analyze the function of the mitochondria-transferred-cell because it is slow and only able to manipulate a single cell. Due to their large size and fragility, there are no other methods to transplant mitochondria at this moment. Shirakashi et al., proposed cell-GUV (Giant Unilamellar Vesicle) electrofusion, where GUVs loaded with low-molecular-weight disaccharides were fused with Jurkat cells. However, neither the efficiency of transfer of the GUV contents (trehalose, raffinose, and KCl in this case) nor cell viability were reported. Their GUVs were prepared by a conventional electroformation, which is not able to enclose large-sized objects.

Here, we describe research aiming at establishing a method to transfer micrometer-sized objects into live cells using cell-GUV electrofusion. In this research we propose to combine the latest reliable method called “w/o emulsion centrifugation” developed for preparing GUVs containing artificial objects larger than 1 μm in diameter and cell-GUV electrofusion. After exposure to the DC pulse, the HeLa cells were cultured on the dishes, and the cells which were stained with cell tracker red and Hoechst 33342 to reveal the cytoplasm (red) and nucleus (blue), respectively (Figure 1(A)), and the z-axial positions were observed. These images show HeLa cells into which no beads, and beads of 0.5, 1, and 2 μm in diameter (green) had been transferred. However, 2 μm microbeads were not observed inside the HeLa cells. The percentage of HeLa cells containing the transferred microbeads was quantified by a flow cytometer. The cells were cultured for 2 days after electrofusion. Figure 1(B) shows histograms of the HeLa cells emitting a green fluorescent signal. The values shown in the inset, for 0.2, 0.5, 1, and 2 μm microbeads, and no microbeads, were 73, 50, 40, 0.4, and 0.3%, respectively. These values were defined as the ratio of cells that demonstrated a fluorescent intensity of more than 10. These data revealed a threshold between 1 and 2 μm for the size of beads transferred into live cells using cell-GUV electrofusion.

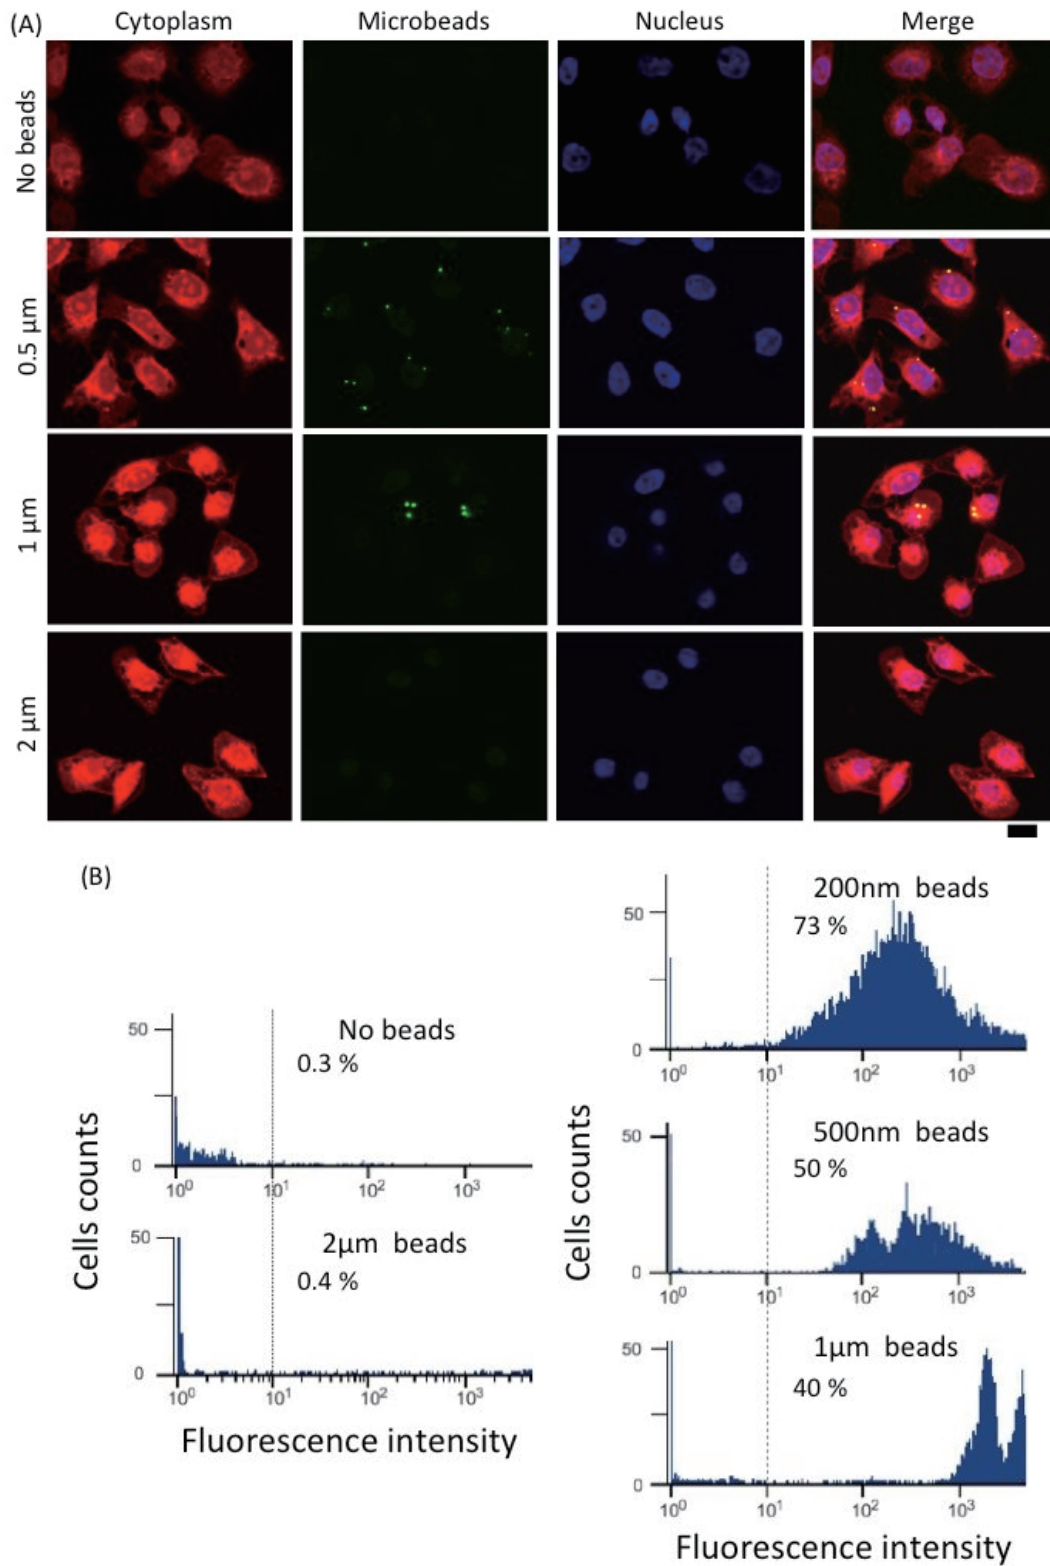


Figure 1 Fluorescent beads with various diameters were transferred into HeLa cells by cell-GUV electrofusion. A: Confocal microscopic images show the cross-section of the treated HeLa cells. Bar = 50 μm . B: Flow cytometric detection of microbeads transferred into HeLa cells. Created based upon figures from SAITO et al., PLOS ONE 9 (9): e106853.

.By using this proposed method, we evaluate various conditions such as GUV membrane properties (charge and elasticity), electrical conditions, and the numerical ratio of GUVs and cells to improve the transfer efficiency and cell viability. As a result, we succeeded in transferring various objects, such as micro magnetic beads, designed DNA origami, and extracted mitochondria. With fluorescent beads as known size markers, we confirm that beads of up to 1 μm in diameter are efficiently transferred into living cells carrying mammalian plasmid expression vectors. We also found that our method does not severely affect cell viability. Namely, after the electrofusion, cells proliferated normally until confluence was reached, and the transferred fluorescent beads were inherited during cell division. In summary, the best transfer efficiency was achieved using negatively charged GUVs, and by using a large number of GUVs compared with cells. We also tried to transfer a designed nanostructure (DNA origami) into living cells, and succeeded. Interestingly, the fluorescent signal of the transferred DNA origami disappeared after overnight culturing because of nucleic decomposition in the cell. Moreover, the cell-GUV electrofusion method can be applied to transfer extracted organelles into other live cells. We have succeeded in transferring mitochondria into living cells by our proposed method. The mitochondria activity was evaluated by antibody staining and the result showed that the transferred mitochondria in live cells could be recognized as foreign substances but they also maintain their activity.

Overall, the results reported here present a milestone for designing artificial symbiosis of functionally active objects (such as nano- to micro-scale machines) and intracellular organelles in living cells. Moreover, these bioengineered hybrid cells are ready to use in drug delivery system, tissue engineering, and for further elucidation of cellular mechanisms.

論文審査結果の要旨

前世紀半ばから続く生命科学の飛躍的な進歩によって、生物の最小単位である細胞を分解して構成する個々の分子を知るのみならず、生きた状態において標的分子および分子システムのダイナミクスを知り、操作するための研究が注目されている。そのために、細胞内にある標的分子の局所的な状態を知り、操作することのできる蛍光ビーズや磁気ビーズなどの人工デバイスが開発されてきた。しかし、これらのマイクロデバイスを細胞が自発的に取り込む効率は低く、核移植などで利用されるマイクロインジェクションでは熟練者の長時間作業が必要となる。そこで、多数の生きた細胞に対して、種々のマイクロオブジェクトを、簡便かつ低侵襲かつ一度に導入できる技術が必要とされている。本論文は、生きた細胞の内部状態を精密に測定し操作するための手法の開発を目的とし、**Cell-GUV electrofusion** を提案する。これは、一度に多量の細胞を操作可能な電気融合法と、人工マイクロカプセルであるリポソーム(GUV)に注目し、細胞と人工マイクロカプセルを電気融合させることで、カプセル中に内包された物質を生きた細胞内に導入する手法である。本論文は、全編5章よりなる。

第1章は序論であり、本研究の背景および目的について述べている。

第2章は、本論文で提案する **Cell-GUV electrofusion** と、これを用いたプラスミド DNA の細胞内導入について述べている。先行研究例と比較し、高分子を生きた細胞に導入でき、導入後も細胞が生存し増殖可能であることを示したもので、本論文で提案する技術の証明となっている。

第3章では、**Cell-GUV electrofusion** 法の特性を評価し、至適導入条件および導入されるマイクロオブジェクトについて検討している。細胞内に導入されうる物体のサイズ、印加電場強度、GUV の表面電荷および脂質膜硬さ、連結維持時間、細胞/GUV 数比を、フローサイトメータおよび生細胞数の定量によって評価した結果について述べている。これに基づき直径 $2\mu\text{m}$ までのオブジェクトを、生きた細胞内に低侵襲に一度に導入できる条件を求め、実験によりその有効性を示している。複数の異なるオブジェクトを同時に同一細胞内に導入可能なことを述べ、例として細胞内に導入された磁気ビーズの外部磁場による易動度測定から細胞内の粘性を測定しうることを、人工ナノ構造として DNA オリガミ分子を導入可能なことが述べられている。提案された手法は種々のマイクロオブジェクトに対し適用可能であり、手法の有効性を示している。

第4章では、**Cell-GUV electrofusion** 法を用いた、マイクロサイズの細胞内小器官を対象とした別(種)の細胞への移植可能性を示している。前章までの条件検討に基づき、細胞から抽出したミトコンドリアの移植が実現できることを示すと共に、移植されたミトコンドリアの活性評価実験を行い、本法を用いた移植の有効性を確認している。これはミトコンドリア病の病態モデル細胞の構築につながる重要な成果である。

第5章は、前章までの結果に対する考察、将来の展望および結論を述べている。

以上を要するに、本論文は、生きた細胞の内部状態を精密に測定し操作するための高効率かつ低侵襲な手法の開発を目的とし、細胞と人工マイクロカプセルであるリポソーム(GUV)とを融合させる **Cell-GUV electrofusion** を提案し、実験によりその有効性を示したもので、バイオリボティクスおよび機械工学の発展に寄与するところが少なくない。

よって、本論文は博士(工学)の学位論文として合格と認める。